
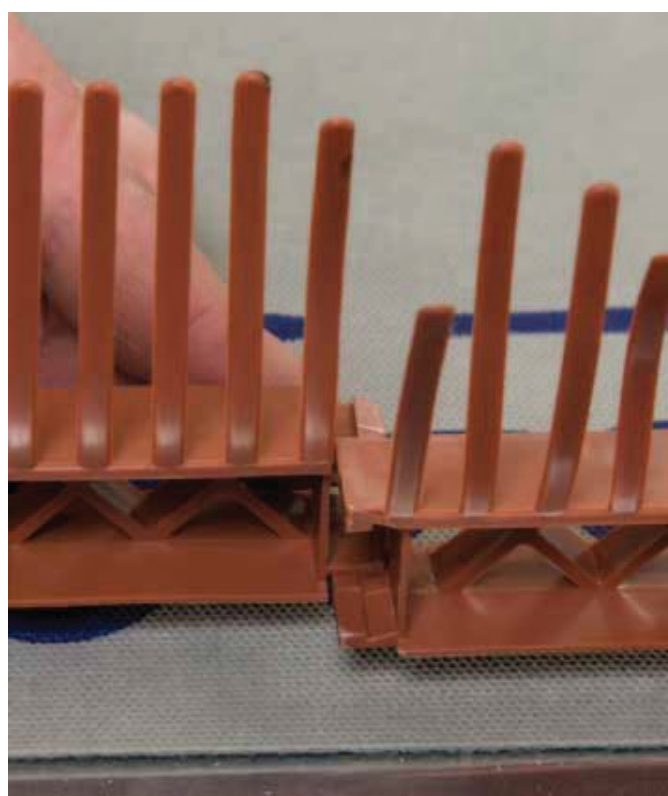


Eaves filler comb vented

The Eaves Filler Comb is a simple and effective way of preventing birds and vermin from entering the batten cavity below profiled concrete interlocking tiles whilst allowing airflow into the batten cavity.

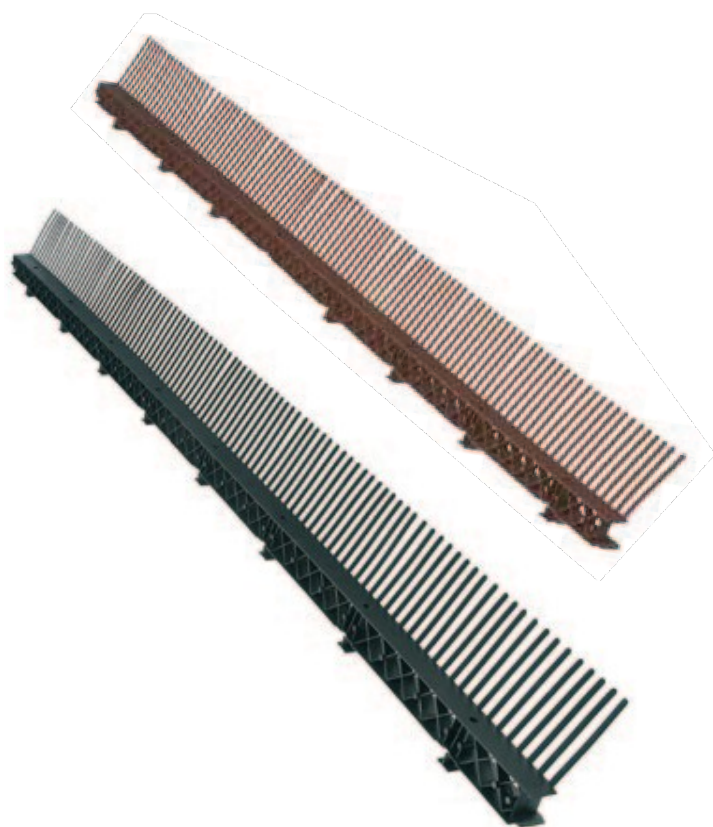

Eaves filler comb vented

- Suits profiled and plain tiles.
- Lightweight and durable
- Secure airflow and free passage for water
- Integral slots allows easy fixing
- Prevent the entry of birds and vermin

The Eaves Filler Comb is positioned over the Underlay Support Tray directly above the fascia board.

With the Combs facing outwards, fix into top of fascia board through the slots provided using corrosion resistant nails along the whole length of the eaves.

If a Fascia Vent has been installed, the Eaves Filler Comb will need to be fixed through the Fascia Vent into the fascia board


Eaves filler comb vented




Prepared for installation.



The Eaves filler comb is placed no more than 20 mm from the edge.

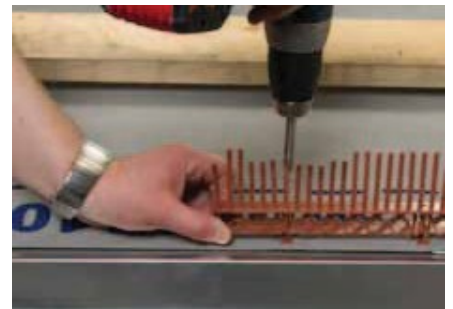

The eaves filler comb is fastened with screws for each 25 cm.

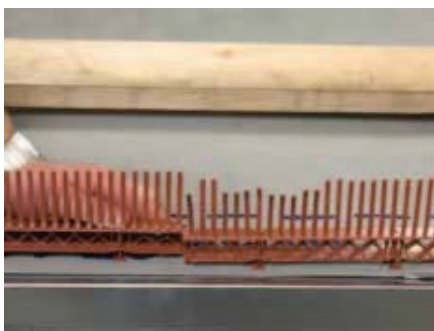

The eaves filler comb is installed all along the roof.



The eaves filler comb is assembled with the integral slots.



The final result.

Installation

The Eaves Filler Comb is positioned over the Underlay Support Tray directly above the fascia board.

With the Combs facing outwards, fix into top of fascia board through the slots provided using corrosion resistant screws along the whole length of the eaves.

If a Fascia Vent has been installed, the Eaves Filler Comb will need to be fixed through the Fascia Vent into the fascia board.

Technical data

| | |
|----------------------|--------------------------------|
| Material. | Polypropylene |
| Colour. | Black or Red |
| Working temperature. | - 20 to + 50 °C |
| Ventilation area. | 200 cm ² per. meter |
| Total length. | 1.000 mm |
| Grid height. | 60 mm |
| Ventilation height. | 32 mm |
| Pcs. Per box. | 100 pcs. |



Kima Roof Accesories ApS
Grindsted Landevej 69, Eg, 7200 Grindsted, Denmark tel: +45 7533 0800
Email: mail@kimarroof.dk webpage: www.kimarroof.dk